


T3. Hydraulic jump

A hydraulic jump is a phenomenon in which the rapid flow of fluid slows down abruptly, resulting in an elevation of the fluid level within the stream. This phenomenon can occur naturally in the flow of a river or canal. Additionally, it is utilised in the construction of dams to decelerate the speed of water flow. Furthermore, hydraulic jumping can be observed in domestic settings. For instance, when a jet of water strikes the surface of a sink, a circular formation with a thin layer of fast-flowing water is formed around it. At a certain distance from the jet, the water level rises, which is hydraulic jumping. The problem requires you to describe this phenomenon using conservation laws.

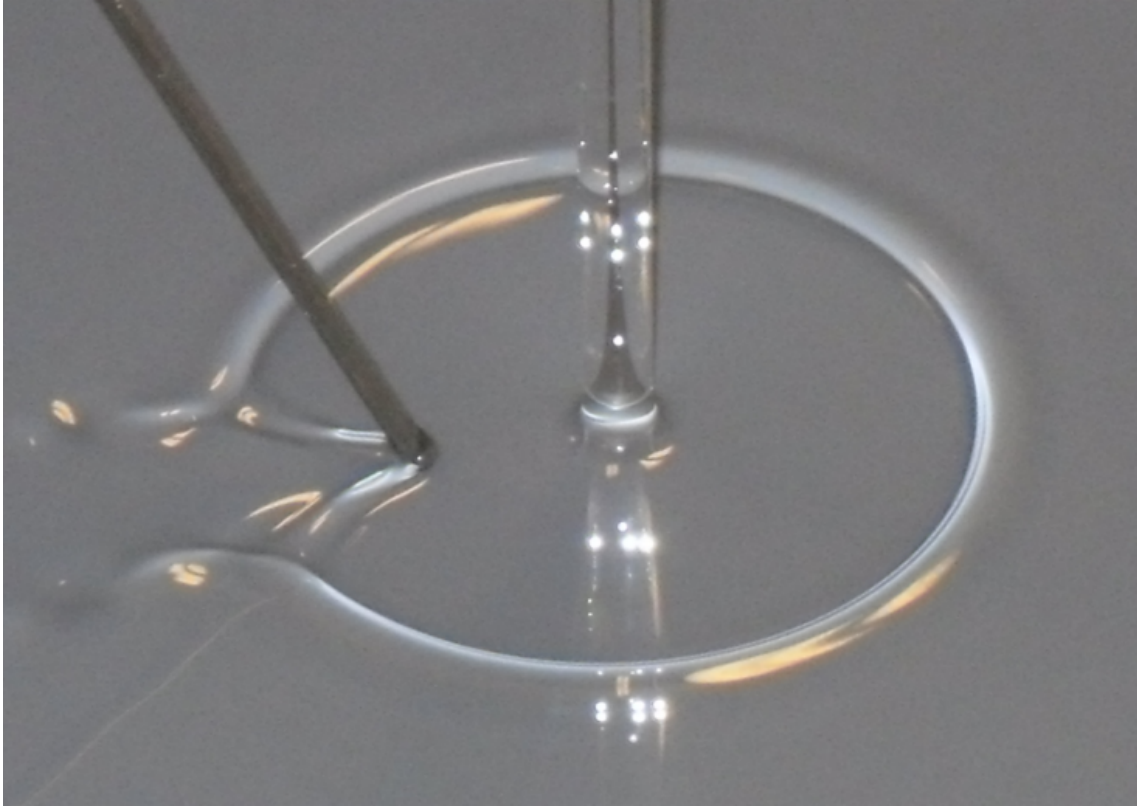

Hydraulic jump around a fluid jet falling on a flat surface. From the work of G. Jannes, R. Piquet, P. Maïssa, C. Mathis, and G. Rousseaux Phys. Rev. E 83, 056312

The entire problem considers the flow of water, which can be considered an incompressible fluid with a density $\rho = 1.0 \cdot 10^3 \text{ kg/m}^3$. The acceleration of free fall is $g = 9.8 \text{ m/s}^2$.

If energy losses are neglected, the Bernoulli equation is satisfied for stationary (time-independent) fluid flow along any current tube. This can be expressed as follows:

$$E = \frac{P}{\rho} + \frac{v^2}{2} + gz = \text{const}$$

In this equation, P represents the pressure, v is the flow velocity, and z denotes the height of the fluid volume under consideration. The value E will be referred to as the specific energy of the given fluid element. The Froude number is employed as a dimensionless parameter to characterise the flow of a fluid, taking into account the force of gravity. This is expressed as follows:

$$Fr = \frac{v}{\sqrt{gd}},$$

where v is the characteristic flow velocity, d is the flow depth.

It should be noted that throughout the entirety of the problem, the atmospheric pressure does not affect the fluid flow. Consequently, its contribution to the Bernoulli equation and to the expressions for forces can be ignored.


Part A. Flow without energy loss

In this part, we will consider the flow of a fluid along a rectangular canal of width b . The fluid motion can be considered steady-state, meaning that the velocity at a given point in the canal is independent of time. The water flow through the canal (the volume of water flowing through the channel cross-section per unit time) is Q . It is assumed that the canal bottom is flat and that the flow velocity is uniform throughout the canal cross-section. Atmospheric pressure does not need to be taken into account.

A1 The depth of water in the canal is d . Find the specific energy of the flow E . The height of the canal, z , should be counted from the bottom. The answer should be expressed in terms of the following variables: Q , b , d , and g .

A2 Determine the critical water depth, d_c , at which the specific energy E is minimal. Express it in terms of Q , b , and g .

A3 Determine the fluid velocity v_c and Froude number Fr_c in the case of critical depth. The answer should be expressed in terms of Q , b , g .



Suppose now that at some point the bottom of the canal rises to a height H and its width remains unchanged. Let d_1 and v_1 be the water depth and flow velocity before the change of the depth, d_2 , v_2 – after the change.

A4 Write two equations following from the laws of conservation of mass and energy of water that relate these quantities. These equations may also include g and H . It is assumed that at all points of the flow the flow is laminar and Bernoulli's law is fulfilled


A5 The equations written in the previous task can not be solved exactly. Therefore, we will assume that the height H is small. Consequently, $\Delta v = v_2 - v_1 \ll v_1$ and $\Delta d = d_2 - d_1 \ll d_1$ are small changes in velocity and depth of flow. In all calculations, we limit ourselves to first-order contributions of H , Δv , and Δd . Determine the values of the ratio $\Delta v/v_1$ and the ratio $\Delta d/d_1$.

A6 Indicate at which values of the Froude number of the flow before changing the depth of the canal the velocity increases and at which values the velocity decreases.

Part B. Theory of hydraulic jumping

In this part we will examine the hydraulic jump in detail. For this purpose, we will again consider the flow of fluid along a rectangular canal of constant width b . The flow area can be divided into three parts:

1. an initial part of fast flow of small depth, where velocity and depth are v_1 and d_1 ;
2. a transition part, the flow in which is highly turbulent and the depth changes and energy losses occur, so the Bernoulli equation cannot be used;
3. a part of slow flow of constant velocity v_2 and depth d_2 .

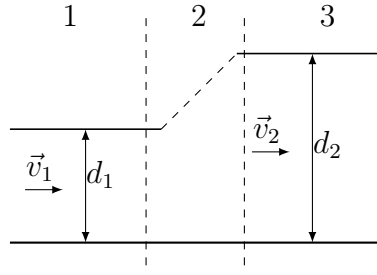

To describe the hydrodynamic jump, let us select the volume of water in the canal in such a way that the left boundary of the selected region lies in part 1 and the right boundary lies in part 3. The law of conservation of mass and the law of momentum change can be applied to the selected volume.

- | | |
|-----------|--|
| B1 | Find the hydrostatic pressure force F acting on the selected volume. It can be demonstrated that the contribution of atmospheric pressure is zero and can be disregarded (proof is not required). It is assumed that the pressure dependence on height is the same as in a stationary fluid. The answer must be expressed in terms of ρ , g , b , d_1 , d_2 . |
| B2 | Write two equations following from the law of conservation of mass and the law of change of momentum that connect v_1 , v_2 , d_1 , d_2 . The answer may also include g , b , ρ . |
| B3 | Using the equations obtained, determine the ratio of the water depth after the jump to the depth before the jump d_2/d_1 . Express the answer in terms of the Froude number of the flow before the jump Fr . |
| B4 | Find the difference of specific energies of the liquid before and after the jump $\Delta E = E_2 - E_1$. Express the answer in terms of g , d_1 , d_2 . |
| B5 | At what values of the Froude number is hydrodynamic jump possible? |

Part C. Hydraulic jump in the sink

In this part, we will use our previous results to estimate the parameters of the hydrodynamic jump that can be observed in the sink. A complete theory would be required to determine the radius of the circle on which the jump occurs. However, it is necessary to take into account fluid viscosity and surface tension. Therefore, we will consider this radius as a given value.

Let a jet with a volumetric flow rate $Q = 3.0 \cdot 10^{-5} \text{ m}^3/\text{s}$ hit a horizontal surface, the jet diameter just before contact with the surface $D = 1.0 \text{ cm}$, the jet is perpendicular to the surface. The flow is symmetric about the symmetry axis of the jet. Consider that the law of conservation of energy is fulfilled in the fluid flow up to the moment of hydraulic jump, and the flow velocity does not depend on the distance from the jet.

- | | |
|-----------|---|
| C1 | Find the velocity v of fluid flow before the hydraulic jump. Give the formula and the numerical value. The answer should be expressed in terms of Q and D . |
| C2 | How does the depth d of water depend on the distance r from the center of the jet? Express the answer in terms of D , r , find the numerical value when $r = r_c = 3 \text{ cm}$ (the radius at which the jump occurs). |
| C3 | Find the Froude number (numerical value) at the point where the hydrodynamic jump occurs. Determine how many times the water depth increases during the jump d_2/d_1 . |